

3940.01 AM/ FM, DAB, DAB+ passiv

Flex-Dachantenne


Dachantenne mit folgenden Eigenschaften:

- geringe Aufbauhöhe durch Einsatz eines Kurzstabes
- Stabneigung von -10° ... 115° einstellbar
- geringer Montageaufwand
- Verwendbar mit **4721.01** (Verstärker+Weiche AM,FM/ DAB+), **4723.01** (Verstärker), **4724.XX** (Weiche, passiv) und **4726.XX** (Verstärker+Weiche AM,FM/ DAB+)

Flex-Roof Mount Antenna

A roof mount antenna with the following specifications:

- Low height by using a short rod
- Whip angle adjustable from 10° ... 115°
- Easy to install
- Usable with **4721.01** (amplifier+diplexer AM, FM / DAB +), **4723.01** (amplifier), **4724.XX** (Diplexer, passive) and **4726.XX** (Amplifier + diplexer AM, FM / DAB +)

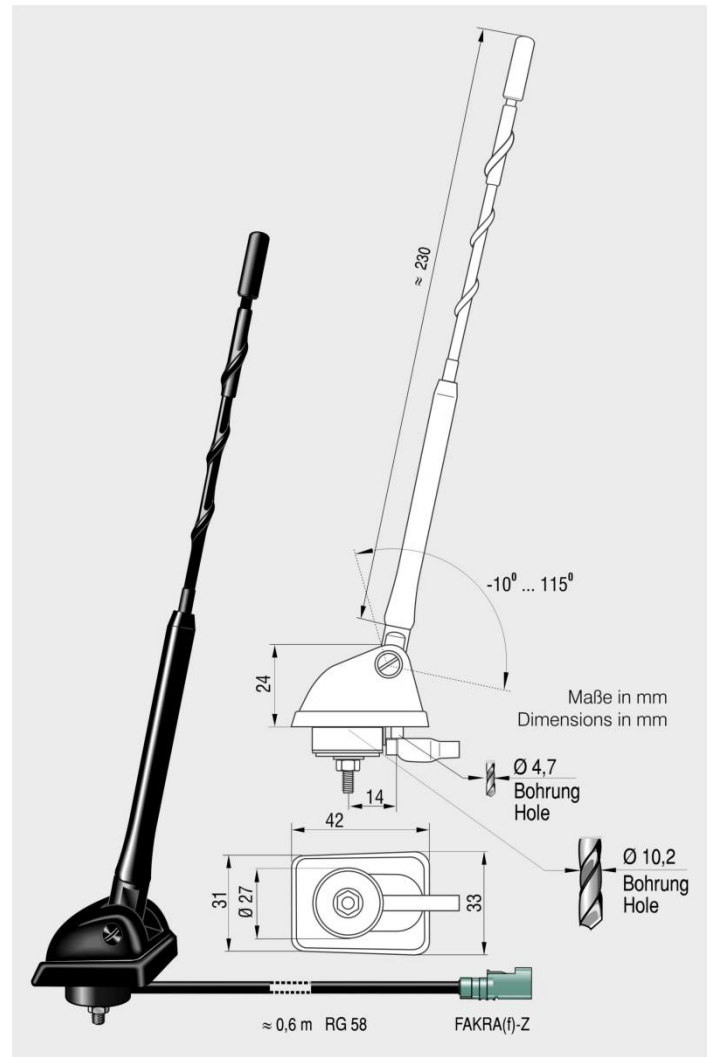

Frequenzbereich	Frequency Range	AM/LMK	FM/ UKW	B III
Frequenz	Frequency	0,15-16 MHz	87,5-108 MHz	174-240 MHz
Gewinn	Gain		-2 dBi *	0 dBi *
Impedanz	Impedance	$\leq 10 \text{ pF}$	50 Ω	
Anpassung	VSWR		$\leq 2,0 : 1$ *	
Kabel RG 58	Cable RG 58	600 mm		
Steckverbinder	Connector	FAKRA (f)-Z		

* Bandmitte/ Center of the band